

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T2S R2W


SEC 14

1/4

SEC 23

U.S.B.&M.

N-19




NORTH

SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	S 27°20'57" W	53.36'
L2	S 44°07'19" W	46.96'
L3	S 32°41'25" W	41.85'
L4	S 37°32'06" W	35.75'
L5	S 80°30'04" W	116.12'

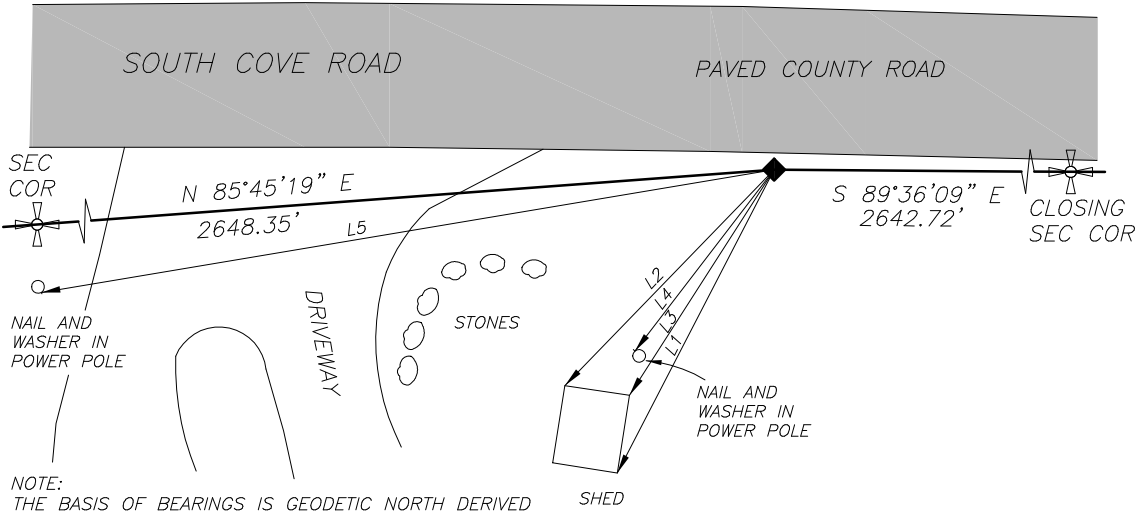

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT. 40°18'07.65076"N AND LONG. 109°59'30.70358"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND BLADED UP ALUMINUM PIPE MONUMENT ON EDGE OF ROAD. USED TIE DATA FROM PREVIOUS SURVEYS TO RESET NEW PIPE MONUMENT



MARKINGS ON MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET A 2½" ALUMINUM PIPE MONUMENT AT POSITION OF 1/4 CORNER

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7281896.259
E: 2037309.566
NAVD88 EL: 5361.14'

LATITUDE: 40°18'07.27087" N
LONGITUDE: 110d04'36.85560" W
ELLIPSOID HEIGHT: 5304.58'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300020S0020W0_540400



PHOTO OF MONUMENT FACING WEST

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 11 DEC '17

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

